

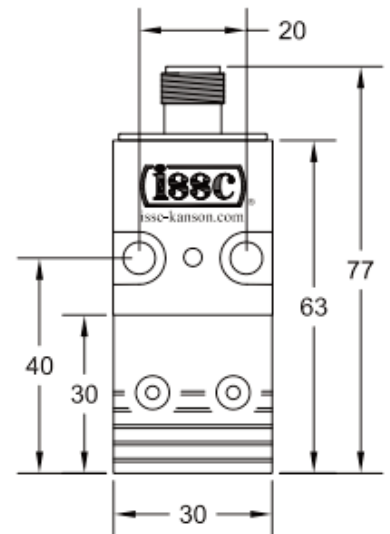


## NBN15-M1-WS-V1-KAN

Operating Distance	15mm
Power Supply	90 - 250 VAC/45-65Hz
Power Drain	≤1.7 mA
Voltage Drop (on state)	≤5 V
Inrush Current	≤2.4A/20ms
Short Circuit Protection	No
Switching Frequency	0 - 25Hz
Repeatability	≤.01mm
Case	PBT/Aluminum
Leds	Yes (2)
Protection Degree	IP67
Operating Temperature	-25°C to +70°C
Load Current	8-400ma
Output	Normally Open (NO)
Hysteresis	3-15% (5% Typical)
Operating Voltage Display	LED, Green
Indication of Switching State	LED, Red
Connection Type	M12 x 1 connector
Mass (weight)	100g (3.6 oz)

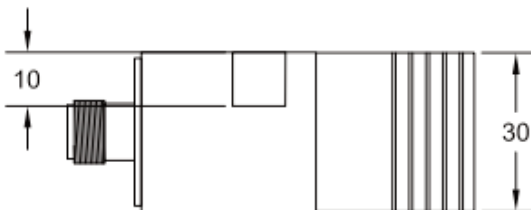

Sensor head is bidirectional and rotatable in 15° increments  
 NEMA ICS5-2000  
 N/O - Switch Function  
 RoHS

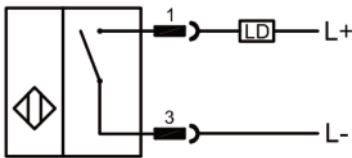

**Accessories:**

- RP-526 2m cable w/ straight connector
- RP-526-5 5m cable w/ straight connector
- RP-530 2m cable w/ 90° right angle connector
- RP-530-5 5m cable w/ 90° right angle connector